

# Airfoil 9120 and 91200 Goggle Instructions

## Removing Lenses:

1. Using your thumbs, push lens out firmly from the inside of the goggle near the nose bridge. Using a cleaning cloth to push out the lenses will keep them clean and scratch-free.



## Installing Lenses:

1. Insert the lens into the track on the outer portion of the frame near the arm.




2. Then firmly press on the opposite end of the lens near the nose-bridge to snap it into place.

If needed, pull open frame gently to help placement.




## Removing Arms/Straps:

1. Press firmly on the release button located inside the rectangular slot on the inner part of the arm near the hinge. Pull on the arm as you press the button. The button will slide under the slot as you pull on the arm.

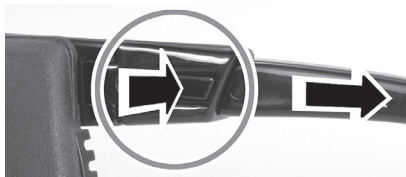

## Installing Arms/Straps:


1. Slide the button/tab on the strap or arm into the slot on the end of the hinge piece of the frame. The button/tab will snap securely into place.

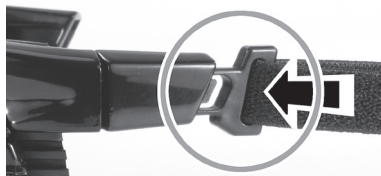

Pacific Coast Sunglasses, Inc: 800-999-9153

## Removing Frame Padding


1. Push out on the grooved wing on the outer portion of the frame to release one side of the padded frame. Repeat on the other side.

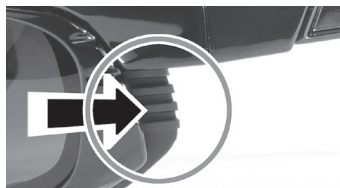

## Installing Frame Padding

1. Slide padding down into frame and over the nose-pieces.

Then snap the tab button into place.

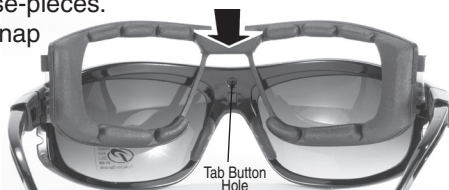

2. Then carefully bend the frame edge back to insert the tab of the padding into the frame slot near the hinge. Repeat on other side.

